


Vertical Warning Flashers

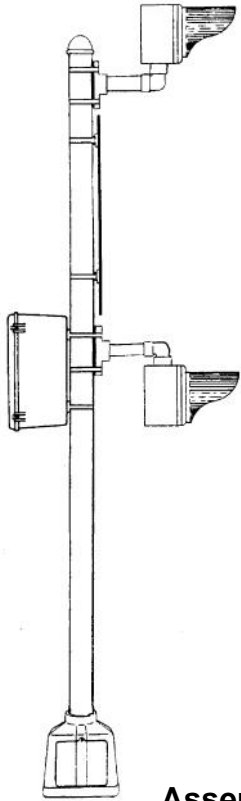


School Zones

Intersections

Fire Stations

Truck Entrances

Emergency Entrances / Exits



Assemblies available with or without signs.

Assemblies feature:

All aluminum hardware (painting optional)

8" or 12" (Polycarbonate or aluminum) yellow beacons

Optional illuminated speed limit face

Standard or custom sign legends available

Illuminated numerals are 8" tall, red

Assemblies do not include (order separately):

Flasher cabinet Anchor Bolt Template Banding material Lamps

Reinforcing Pole Collars Power installed base foundations

1



2



3 (8" Beacons)
A (12" Beacons)



4 (8" Beacons)
B (12" Beacons)



5



1-800-345-6329

84

© Traffic Parts, Inc.

Options:

Traffic Parts, Inc.

- 1. Pole type** (w/alum pole cap, if reqd)
 S=Steel (Galv) T=Steel, no pole cap
 A=Al B=Al, no pole cap N=None

2. Pole Length

0=10' 1=11' 2=12' 3=13' 4=14' 5=15'
 6=16' 7=17' 8=18' 9=19' T=20' N=None

Approx. grnd clearance w/base + 10' pole		
Sign Type	Hdwr Config	Grnd Clearance
1	1A/1F	5'6"
	1B	7'
	1C	4'
	1D/1G	3'4"
	1E	7'
2	2A	4'
	2B	7'
3,4	3A,4A	6 1/2'
5	1A	6 1/2'
	1B	8 1/2'
	1C	5 1/2'
	1D	4 1/2'
	1E	8 1/2'

3. Base (*=With 1/4" Ground Lug)

*1=Square,Al 2=Octag,Al N=None
 3=Square,Fe 4=Octag,Fe X=Special
 *5=Sq Al, long neck, ASHTO
 6=Split Dec Base, Plastic
 *P=Sq Al, w/Plastic Door, ASHTO

4. Anchor Bolts/Foundation

3/4"X18"X3 1/2", w/flat wshr, hexnut
 N=None S=Black Steel G=Galv
 F=8"x5' Foundation Anchor, Sch 20

5. Flashing Beacon Size/Color

9=LED Rdy, 8" 0=LED Rdy, 12"

	Incandesc		LED, 120vac		LED, 12vdc	
	8"	12"	8"	12"	8"	12"
Yel	E	T	1	2	5	6
Red	R	S	3	4	7	8

6. Signal/Sign Material

P=PC on EG Sign 1=PC FYG HI Sign
 A=AL on EG Sign 2=AL on FYG HI Sign

7. Signal Visors

T=Tunnel C=Cap N=None

8. Signal Housing Color

Code->	Y	B	F	G	C	V	E	X
Body	Y	B	FB	G	Y	B	Y	?
Door	Y	B	FB	G	B	Y	Y	?
Visor	Y	B	FB	G	B	B	B	?

9. Sign Type (EG on .080 Al)

Outboard Flashing Beacons:

1=Printed Speed Limit (S5-1), 24"X48"

2=Illuminated Speed Limit, 24"X48"

Inboard Flashing Beacons (8", 12" Al only):

12" Illum Speed: 3=30"X60", A=36"X72"

Printed Speed: 4=30"X60", B=36"X72"

5=School Crossing (S2-1), 30"X30"

N=None X=Special (Most hwy signs avail)

10. Speed Limit (LED)

4=15mph 5=20mph 6=25mph N=N/A

Y=LED, 120vac, Specify mph

Z=LED, 12vdc, Specify mph

11-12. Configuration (1A, 2A, etc.)

13. Paint Items

N=None (natural finish) X=Special

1=Mnt Hdw Only 2=Mnt Hdw, Pole, Base

14. Color

Y=Yellow B=Gloss Blk F=Flat Blk

G=Dk Grn L=Light Grn Z=Bronze

X=Special N=None (natural finish)

15. Pole Mounting

B=Banding, 4.5" OD pole

U=U-Bolt Mount, 4.5" OD pole

P=PC Arms N=No pole plates/post top

W=Wood pole (#1176/1177 pole plates)

VWARN	-				-					-					-										
Option Category ➔		1	2	3		4	5	6		7	8	9		10	11	12		13	14	15		16	17	18	19

Configurations: Vertical Warning Flashers

