


Flasher Cabinets

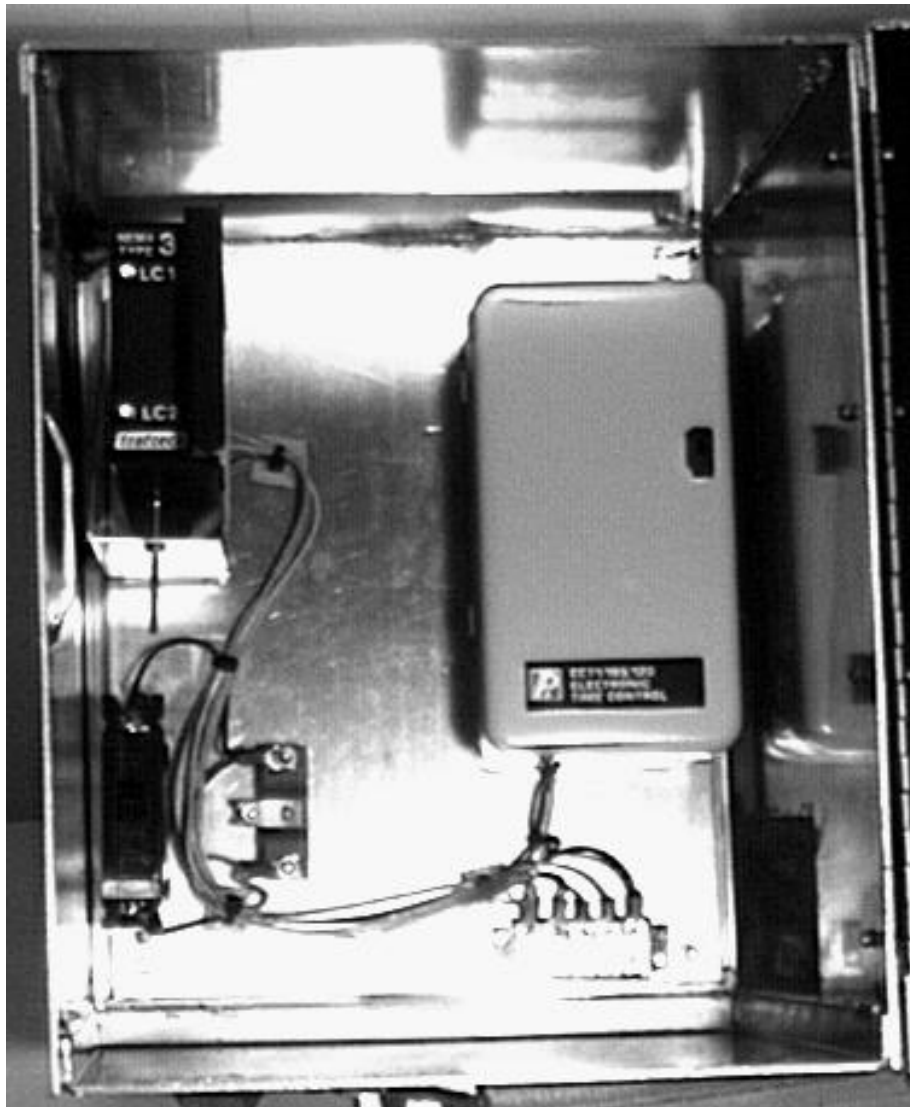

Flasher Cabinet Standard Features:

14" x 11" x 11" All aluminum Cabinet

Universal mounting tabs (Attach with lag bolt, banding, gear clamps)

Standard police key lock w/1 key

Replaceable two-circuit NEMA Flasher:

Rated for traffic use

Easy Access Horizontal Plug-in

15A Circuit Breaker

Surge Arrestor (Heavy duty model optional)

Terminal Block for electrical connections

Screened vents for convection cooling

Options:

Traffic Parts, Inc.

Activation

1. Time Clock/TDR

- N=None X=Special
- 2=Manual, Key Sw or Ext NO(Presence)
- 3=TDR, Momentary Keyswitches
- 5=TDR, PB/External Momentary NO
(Order remote buttons separately)
- P=TDR, Wireless XMT/RCVR
- L=Loop Amp Activation
- 365 day clocks (various brands) avail

Auxiliary Equipment

2. Line Filter

- N=None Y=Std duty (30a)
- H=Heavy Duty (60a)

3. Surge Protector

- 1=Std Duty 2=Hvy Duty
- 3=Extra Heavy Duty

4. Relay Activation

- Isolation relay between clock and flasher unit to protect clock.
- N=None Y=Std Duty (10a)
- H=Heavy Duty (20a)

5. Flasher

- 1=NEMA, discrete components
- 2=NEMA, replaceable cubes
- 3=NEMA, discrete, dimmable
- 4=CALTRANS flasher
- C=Cube Flasher N=None

Entrance Hubs (Installed)

Specify Location

6. Number of installed hubs

- N=None 1,2,3,4 (note location)

7. Size of installed hubs

- A=3/4" B=1" C=1 1/4"
- D=1 1/2" E=2" N=None

Hardware/Paint

8. Color

- N=None (natural finish)
- Y=Yellow B=Gloss Blk F=Flat Blk
- G=Dk Grn L=Light Grn Z=Bronze
- X=Special

9. Mounting Brackets

- N=None
- 1= Light duty SS Banding Brkts (2)
- U= UBolt Mount (1), 4.5"OD pole
- V= UBolt Mnt (1),4.5"OD pole,
w/vandal cones
- B= Heavy duty Banding Mount (1)
- S= Square Pole, 4"

10. Cabinet

- 1= Basic (14x11x11/Slam Lock)
- 2=TXDOT (18x12.75x11.75/Slam Lock)
- X=Special

11. Lock/Key Type

- P=Police Key
- 2=#2 key

FLCAB	-				-					-					-										
<i>Option Category</i> ➔		1	2	3		4	5	6		7	8	9		10	11	12		13	14	15		16	17	18	19